



Be ready for the future: Draka Datacom Solution

Modern networks face stiff demands. They must be fast and reliable, resist fire and not interfere with other equipment.

UC^{FIBRE}

Optical Fibre Cable –
a fast, reliable and always
available part of the
Draka Datacom Solution

Who is Draka Communications?

Draka Communications – a member of Draka Holding N.V. located in Amsterdam – offers a versatile and reliable range of copper and optical fibre cables for the transmission in the data and telecommunication industry.

Our long-lasting expertise in cable and fibre business has been the basis for us holding a major market position today. Draka Communications is located in more than 30 countries in Europe, Asia, North America and South America.



For many decades, we have been designing, developing, manufacturing and selling a variety of high-quality copper and optical fibre cables in order to offer you cable solutions for present and future challenges - let it be standard product or tailor-made special cables.

In the communication infrastructure, our well proven products are always in use wher-

ever it is a question of professional and undisturbed data, voice, audio and video transmission.

The range of UC^{FIBRE} as described in this brochure has been designed for data transmission and offers a high-capacity and flexible cable concept with best future prospects to our customers from within the industry, trade and service sector.

How can we help you build your network?



Value Innovation is a way of looking at the world. By combining market insight with technological know-how and building strong, long-lasting relationships, we add value to your business with advanced communication solutions and services that are designed to last. No matter how complex your challenge, we have a product or solution that will do more than meet your needs. New applications, breakthrough cables or complete network-designs - it's all part of what we call Value Innovation, and it's what drives us.



Application of UC^{FIBRE}

LAN

When it comes to data transmission cables, more and more users decide for fibre technology. It is the undisputed number one in today's Local Area Networks (LAN) – structured cabling in campus and riser networks. There is a trend to Fibre-to-the-desk, e.g. optical fibre cables in horizontal networks.









The decision to use either fibre optic or copper data cables as an ideal solution for horizontal networks depends on many factors like application environment, previous network basis and future needs.


Whatever you decide for, with fibre optic data cables of the UC^{FIBRE} series – specifically

designed to meet the requirements of all structural levels of local networks – you are on the safe side for the future.

Transmission rates are developing exponentially. New transmission protocols follow in ever shorter periods of time. The present standard is 10 Gigabit Ethernet with ten billion bits per second (10Gbit/s). With its outstanding transmission performance, fibre optic cables of Draka Communications provide the ideal basis for the application of future transmission protocols.



-  horizontal cable (FTTD)
-  horizontal distributor
-  building service riser for cables
-  building distributor
-  WAN access point
-  campus distributor
-  campus backbone cable
-  building backbone cable

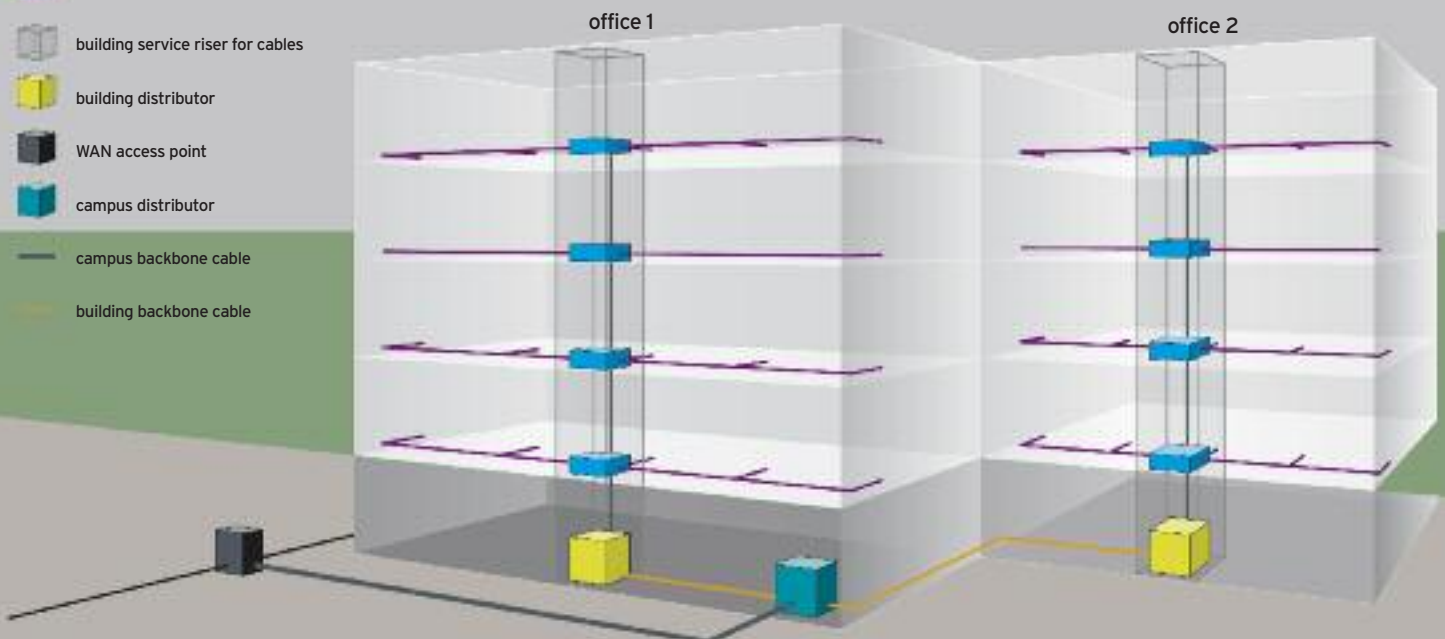

Data Centre

Every data centre is a unique structure. There are various segments of different requirements which need to be understood before creating any solution.

Data centre backbones are already equipped with optical fibre technology. It is state-of-the-art and offers lowest attenuation at highest data rates which is a prerequisite for backbone data links. With data centres it forms one of the most demanded components due to the highly aggregated data traffic there.

As soon as 10 Gigabit Ethernet comes to the agenda at Client level, a data centre backbone capable of 10GbE to link between Access and Distribution level turns into a real bottleneck. Despite the fact that copper data cables are capable of covering a distance of up to 100m at 10Gbit/s, the preference in this place should be laser optimized multimode fibre according to OM3 specification. Today's recommendation is clearly to take this future proof solution which is the only short-link

technology that is also part of the 40 Gigabit Ethernet and likewise 100GbE development program, which will be based on multi lane structures of OM3 channel links. A data centre backbone in OM3 can therefore be easily expanded to the Next Generation Ethernet and secures investments for a longer pack-off time.

Draka's patented PCVD fibre manufacturing technology enables high-precision refractive index profiles which are the key to laser launched high-speed links. This makes the difference between MaxCap300 exceeding by far OM3 specifications and traditional multimode fibres like OM1 and OM2.

This fibre technology is available in Draka cable designs to meet the specific needs of data centre infrastructures, let it be a single core cable or the popular shotgun cable design with figure-8 shape, the break-out cable for multiple fan outs or loose tube cable design with high fibre counts for trunk lines.

More and more in use is the MPO-style optical fibre connector, which requires small cables to fit the planar structure of its fibre management as well as its outer dimensions. Draka's specifically designed MPO cable is made for interconnects of 40GBase-SR4 channels which is one of the next options into a data centre's infrastructure of the future.



Industry

Ethernet – the classic office application – is increasingly accepted also in industrial automation. In addition to bus solutions still to be encountered, Ethernet makes it possible to manage communication. It is possible to selectively access every single point in the network which makes adjustments and modifications much easier and in the end leads to a reduction of idle times and an increase in productivity.

Fibre optic cables of series UC^{FIBRE} are the first choice for Ethernet in a rough industrial environment. Here the cables prove their superiority as to mechanical, chemical and climatic capacity – and, of course, you don't have to care about electromagnetic interferences.

International Standards

ISO/IEC 11801 (2002)

Generic cabling for customer premises

ISO/IEC 24702 (2005)

Generic cabling systems – Industrial premises

ISO/IEC 15018 (2005)

Generic cabling systems – Residential premises

European Standards

EN 50173-1 Generic cabling systems

- General requirements

EN 50173-2 Generic cabling systems

- Office premises

EN 50173-3 Generic cabling systems

- Industrial premises

EN 50173-4 Generic cabling systems

- Residential premises

EN 50173-5 Generic cabling systems

- Data centres


Ethernet Applications at 850 nm

| | OM4* MaxCap 550 50 µm 10G / 550m | OM3 MaxCap 300 50 µm 10G / 300m | OM2 50 µm 500 / 500 MHz.km | OM1 62.5 µm 200 / 500 MHz.km |
|-------------------------|-------------------------------------|------------------------------------|-------------------------------|---------------------------------|
| 40Gb/s (40GBASE-SR4) | 300 m** | 100 m | - | - |
| 10Gb/s (10GBASE-SR) | 550 m | 300 m | 86 m | 33 m |
| 1Gb/s (1000BASE-SX) | 1100 m | 900 m | 550 m | 275 m |

Table 1: Ethernet applications and permissible channel lengths with MaxCap multimode fibre

*) = draft IEC standard

**) = future IEEE work item

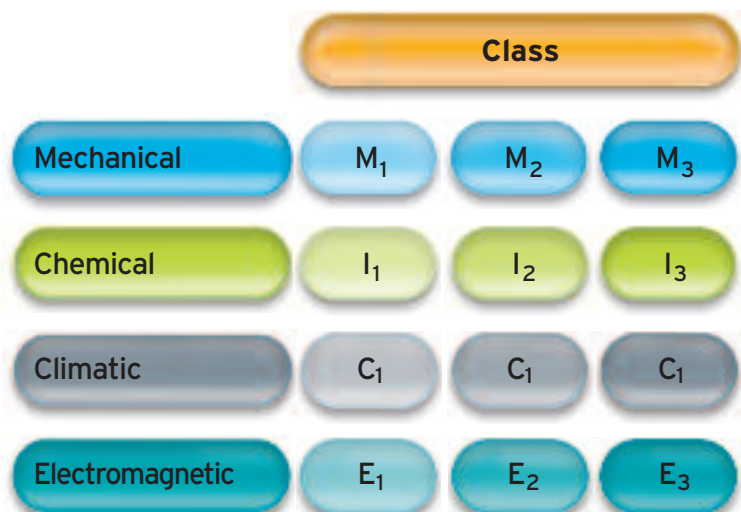

Mice Matrix

MICE is the heading under which the demands for wiring are covered in standardization. Herewith a set of requirements is defined which consists of mechanical (M), chemical ingress (I), climatic (C) and electromagnetic (E) components. These requirements address different environments which are distinguished in three classes: Office, Light Industry, Heavy Industry

Optical fibre principle

Utmost accuracy during the manufacturing process – this is the “secret” of a high-capacity optical fibre. Only top quality permits an optimum data transmission – especially in the new high-speed networks. The necessary processes such as the plasma-activated deposition (PCVD) require state-of-the-art manufacturing techniques as well as a special know-how of our employees.

Sophisticated PCVD process

It is the highly accurate process of the so-called plasma-activated deposition (PCVD) that makes our fibre optic cable exceptionally proven for future requirements.

Transmission protocols like 10 Gigabit Ethernet require fibre qualities that also work under laser launch. For this purpose, the dispersion needs to be minimized over the whole diameter of the fibre. This is expressed by the term Differential Mode Delay (DMD) and is best achieved by the PCVD process which is, of course, applied to all fibres of series UC^{FIBRE}.

Primary coating

The fibre coating consists of a double layer of UV cured acrylate of type DLPC9.

Beside the perfect performance of fibres with this coating in unit cores, also an easy application in cable cores with central tubes has been considered. Thus the micro-bending properties have been improved in an elegant way.

This fibre coating can easily be removed over a wide range of ambient temperatures. No coating residues will be left on the fibre after removal.

All fibres coated with DLPC9 show extremely good parameters regarding mechanical strains. This allows the safe application of these optical fibres also in a rough environment.



The PCVD process



requires clean-room conditions: Thousands of thin glass layers are applied to the inner surface of a silica glass tube. The individual layers slightly differ from each other due to the varying percentage of germanium dioxide in the surrounding silica glass, thus creating the desired refraction index.

Fibre designs

Users of fibre technology have the choice between multimode (MM) fibres with a big optical core and singlemode (SM) fibres with a very small core where only one single "light beam" can propagate.

Application strengths

Compared to multimode fibres, single-mode fibres have excellent transmission properties. However, its use requires more demanding transmission elements as well as narrow tolerance connecting components. Due to their strengths, multimode fibres are therefore mainly applied in local networks where short lengths dominate. However, in broadband access networks, for long distances and especially in telecom transmission networks, only singlemode fibres are applied.

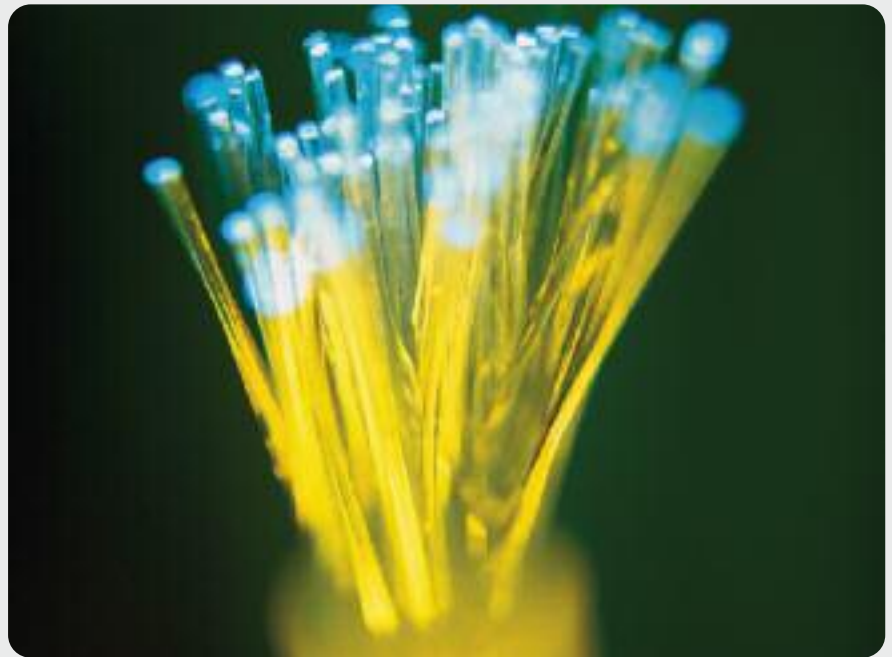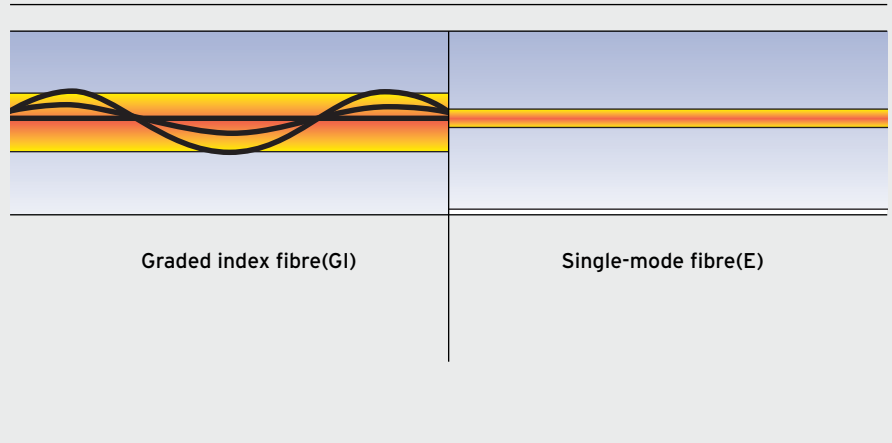

Grade-index profile

A multimode fibre must have a refraction index with a gradient profile. Only by this way the different light beams will arrive at the receiver in sequence. Otherwise, the modal dispersion would impede the safe separation of quickly succeeding pulses. The longer the fibre length, the stronger this effect is. Therefore, every fibre is characterized by a specific length limit. High-quality optical fibres have a high length limit.

Step-index profile

Compared to other light waves, there are no delay skews with singlemode fibres. Decisive for transmission bandwidth are rather material-related dispersion mechanisms. A typical value for the band width is 10GHz/km. Singlemode fibres enable wavelength ranges with the lowest attenuation at 1550 nm and beyond this up to 1625 nm.

HighCap Access – MAXCAP 550™

Even with long distances, UC^{FIBRE} cables have a low attenuation and a high bandwidth. They ensure an excellent transmission potential for dynamic data networks. Also the other advantages are convincing: maximum link distances for a cost-effective design of the central network management, no electromagnetic interference, no crosstalk, safe potential separation and increased tap proof.

Fibre bandwidth

Fibre optic cables of Draka Comteq set standards with regard to bandwidth. The decisive performance criterion of a multimode fibre is the modal bandwidth. The more the bandwidth decreases the more the fibre length increases. This is mainly due to the different dispersion ways of the light which lead to mode dispersion. This mode dispersion again results in a pulse expansion and limits the pulse rate. If the pulses are no longer separable, no signal identification is possible. Therefore Draka only applies fibres characterized by a minimum pulse expansion.

Fibre attenuation

The lower the attenuation the more informa-


tion arrives at the receiver. The attenuation curve of a fibre optic cable looks like a roller coaster. This strange curve is due to resonance, dispersion and absorption in the glass. Areas showing a particularly low attenuation are called „optical windows“. Therefore, fibre optic data cables are optimized for these wavelength ranges.

Maximum link distances due to laser-optimized fibres

For the application in new high-speed network protocols with 1 Gbit Ethernet, our fibre optic cables have been laser-optimized – as documented by the HiCap™ certificate. At a wavelength of 1310 nm, they enable a distance of 2000 m which is twice as much as proposed by the IEEE.

The cost-effective 10 Gbit Ethernet at 850nm is ideally supported by MaxCap 300™, the high-quality OM3 multimode fibre of the well proven PCVD process.

The OM3+ Highend fibre MaxCap 550™ offers optimal prospects for the future. Without re-installations, idle times and additional investments, it makes distances possible which allow the change to the next faster transmission protocol by using the existing network structure on the same infrastructure. It does not matter whether it concerns the frequently used applications with light emitting diodes (LED) or new processes on the basis of VCSE lasers or the high-quality Fabry-Perot lasers for backbone applications with highest data rates of up to 10 Gigabits/s.

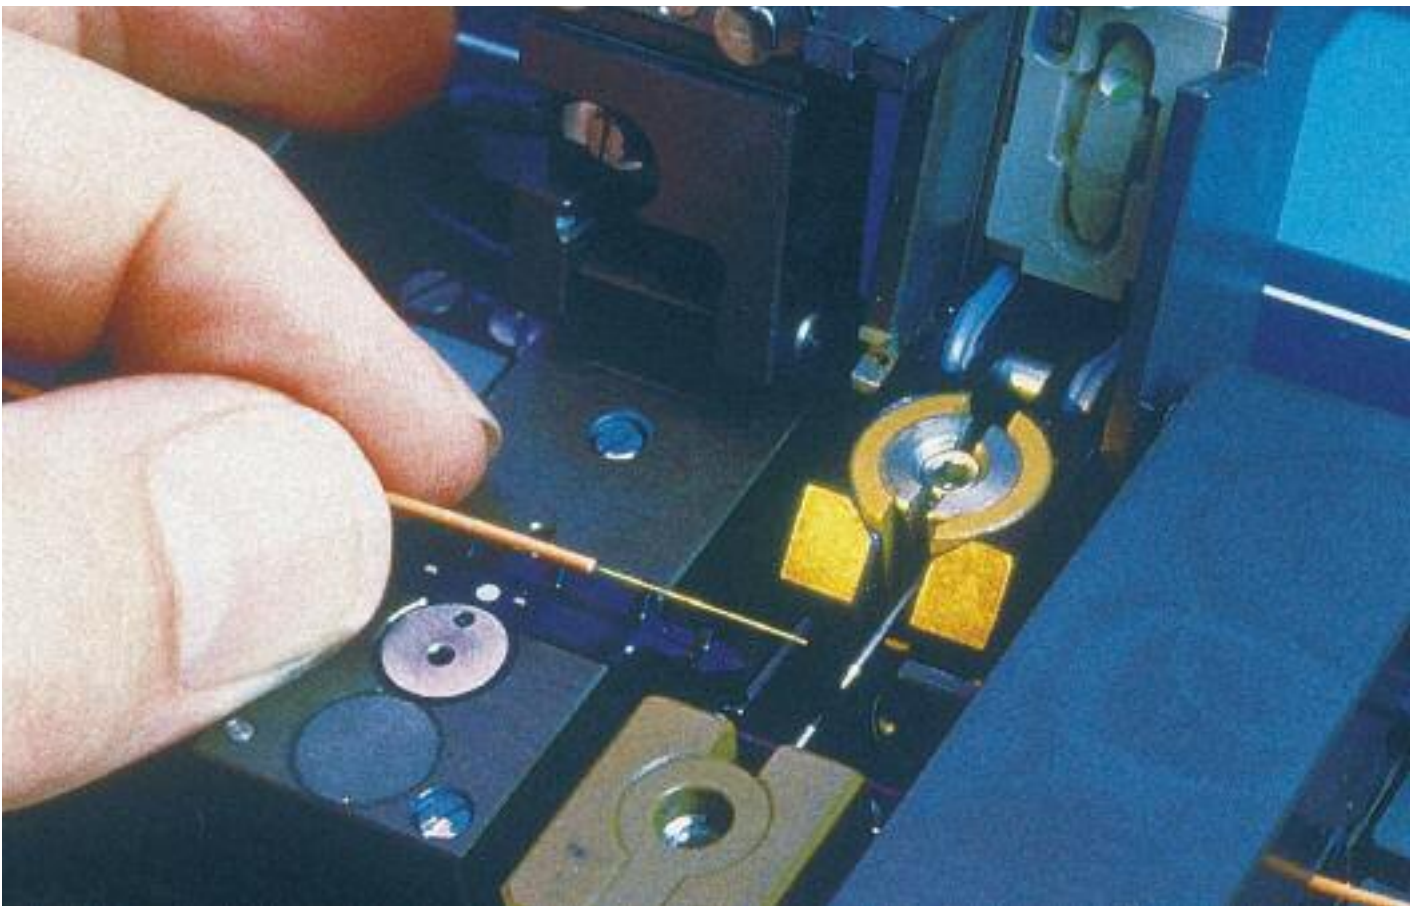

Draka's MaxCap 550™ blue print for new OM4 standard:


OM4 multimode fibre is ideal for 10G link applications requiring a higher power budget, for example when more connectors are required, which is the case in Data Centres. They are also perfect for 10G applications requiring a longer distance than 300 meters (up to 550 meters). Finally, OM4 fibres are future proof, especially for 40 Gb/s and 100 Gb/s Ethernet solutions.

These new system applications are currently under development by IEEE802.3ba, where an extended distance version is considered up to 250 meters using OM4 multimode fibre above the currently agreed 100 meters. In addition, Fibre Channel is considering using OM4 multimode fibre for its future high speed solutions.

The evolution of fibre optic technology through new manufacturing techniques and processes is revolutionizing data networks as they steadily progress towards 10Gb/s applications and upwards to 40Gb/s and 100Gb/s Ethernet solutions.

Draka is already able to conform to OM4 specifications with its MaxCap 550™ multimode fibre, putting it in the forefront in replying to industry requirements for cable that can extend link distances in next generation data communications networks.

Still permanent growth

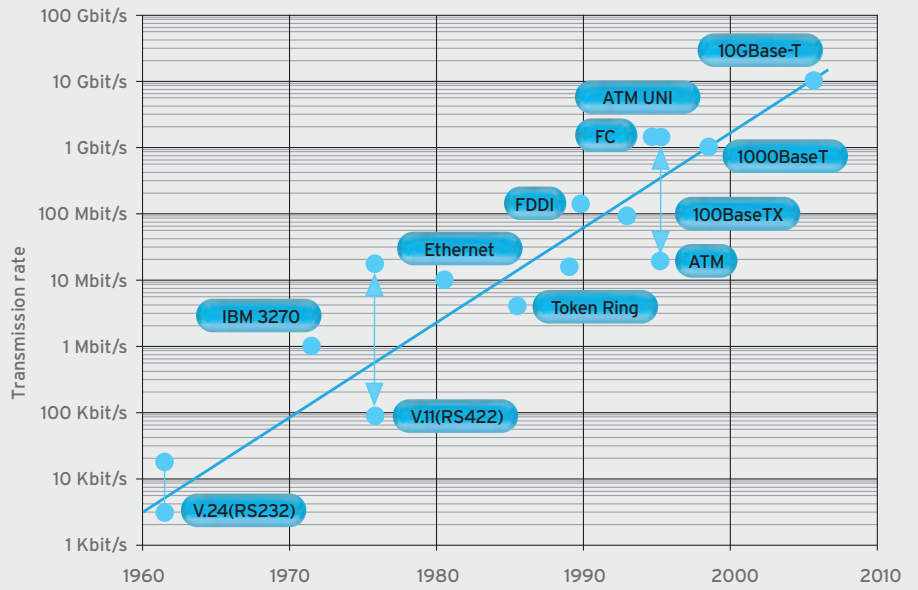

| | | Ethernet applications at 850 nm | | | Ethernet applications at 1300 nm | | |
|-------|------------------------------------|---------------------------------|-------------|------------|----------------------------------|-------------|-------------|
| Class | Type | 100Base SX | 1000Base SX | 10GBase SR | 100Base SX | 1000Base LX | 10GBase LX4 |
| OM1 | Standard 62,5 um 200/600 MHz.km | 300 m | 275 m | 35 m | 2000 m | 550 m | 300 m |
| OM2 | Premium 50 um 600/1200 MHz.km | 300 m | 550 m | 86 m | 2000 m | 550 m | 300 m |
| OM1+ | HiCap 62,5 um 1G/1000 m | 300 m | 500 m | 65 m | 2000 m | 1000 m | 450 m |
| OM2+ | HiCap 50 um 1G/2000 m | 300 m | 750 m | 110 m | 2000 m | 2000 m | 900 m |
| OM3 | MaxCap 300 50 um 10G/300 m | 300 m | 900 m | 300 m | 2000 m | 550 m | 300 m |
| OM3+ | MaxCap 550 50 um 10G/550 m | 300 m | 1100 m | 550 m | 2000 m | 550 m | 300 m |

Singlemode fibres

Today, the singlemode fibre according to the ITU-T G.652 standard is considered to be 'a classic'. It meets international standards and is to be found in countless communication networks. Its transmission performance is excellent. Singlemode fibres of series UC^{FIBRE} are based on the matched-cladding principle. Thus an optimum splicing performance is achieved that is compatible with all fibres known on the market.

Low Water Peak: Singlemode fibres according to ITU-T:G.652.D

This singlemode fibre is attenuation-optimized over the whole range from 1260 nm to 1625 nm. Same as with fibre types according to ITU-T G.652 B, the attenuation values at 1310 nm and 1550 nm are kept at a very low level here. Also for the wavelength 1385, the classic water peak region, optimum attenuation values are achieved.

Thus, this new fibre type offers high flexibility for the application in modern optical transmission technologies (single channel,


wide and Dense Wavelength Division Multiplex) as well as for combinations of new and traditional transmission systems. This optical fibre type complies with and even exceeds the IEC 60793-2-50 Type B 1.3 Optical Fibre.

Dispersion-optimized singlemode fibre according to ITU-T G.655.E/G.656

This NZD singlemode fibre has been specifically developed for the application of the Dense Wavelength Division Multiplex (DWDM) from 1530 nm to 1625 nm (C and L band). Hence, the ideal optical parameters – such as a defined dispersion optimum and low

attenuation – are exactly adjusted to these wavelengths between 1530 nm and 1625 nm. Draka fibres of this type exceed the international standard IEC 60793-2-50 Type B.4/B.5.

With these fibre properties, costs for amplifiers and particularly for Dispersion Compensating Modules (DCM) can be saved especially in metro and city networks, but also in many trunk networks. High system reserves can be reached with these NZD fibres as to bit rates, e.g. 10 to 40 GBit/s per channel, and distances, e.g. 40 to 80 km.

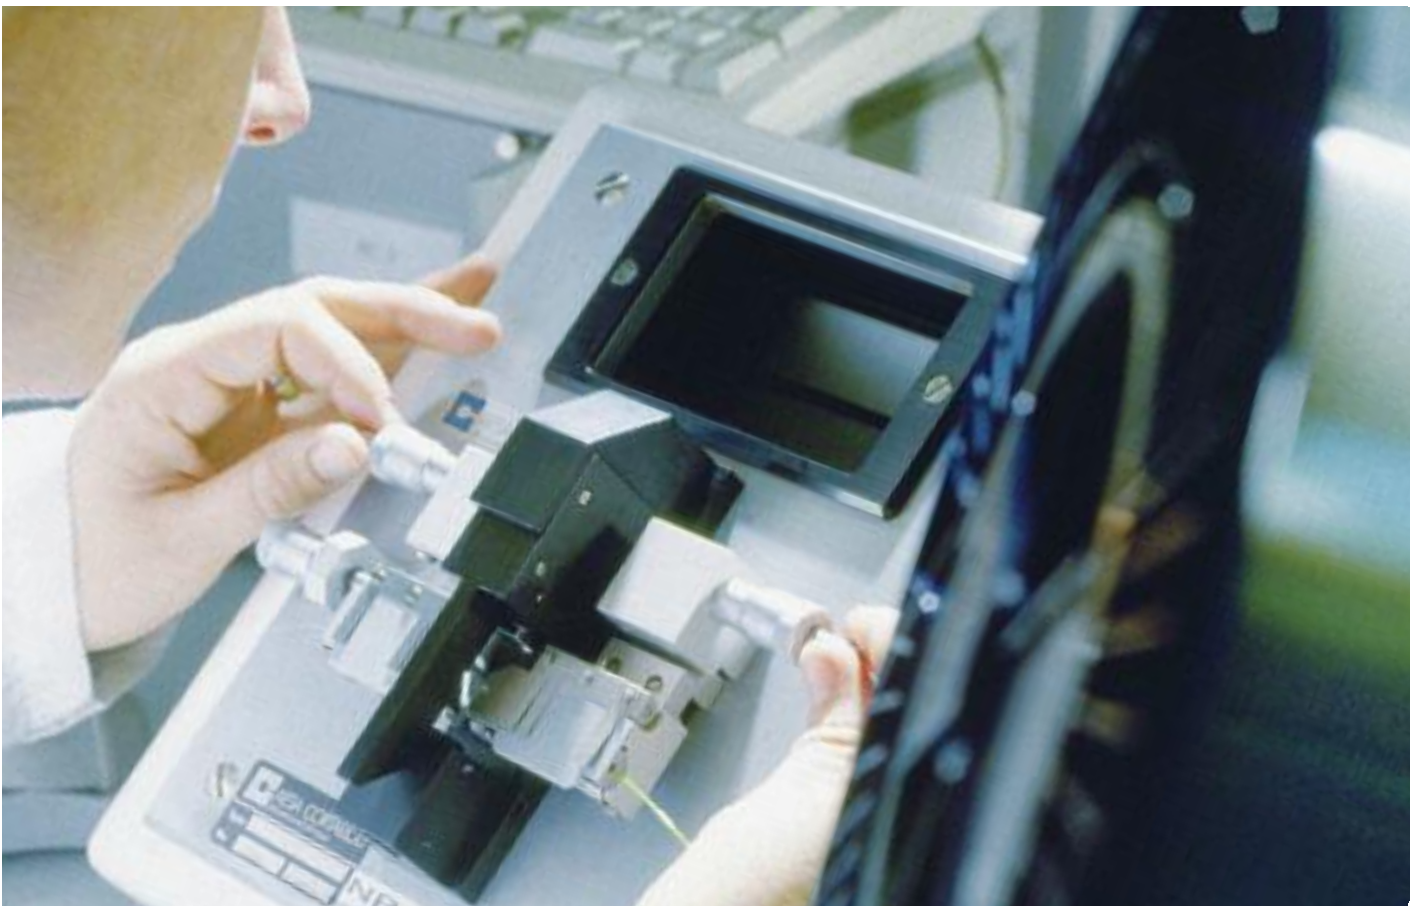



BendBright^{XS}

The key feature in the fibre design that allows for such significant improvement in macro bending performance is the insertion of a field confining "trench" in the fibre cladding. This trench reduces the optical power in the region just outside the guiding core, which is very beneficial in keeping the signal inside the fibre when the fibre is bent. Using a trench to achieve this level of performance is only possible using Draka's versatile Plasma Chemical Vapor Deposition (PCVD) process.

As the figure below depicts, BendBright^{XS} exceeds the bend loss requirements of ITU-T G.657.B, the most stringent bending standard in the industry. This is an order of magnitude improvement over Draka's 1st generation bend-insensitive fiber, BendBright^{XS}, as well as conventional ESMF. BendBright^{XS} is fully compliant with both the A and B classes of the ITU-T G.657 bend insensitive fibre standard, established in 2006. The fibre is also fully compliant with ITU-T G.652.D low water peak singlemode fibre specification.

Why BendBright^{XS} ?

- 100x bending improvement over SMF
- Exceeds toughest bending standards; ITU-T G.657.B
- Fully backwards compatible with SMF; G.652.D compliant
- Over 250 million meters sold since 2006
- Deployed in over 30 countries worldwide
- Greater than 10 million splices and connectors
- Used everywhere in the network!

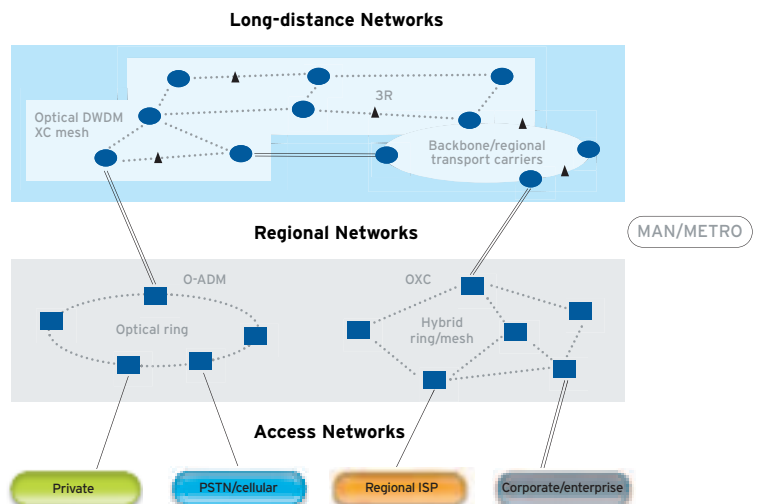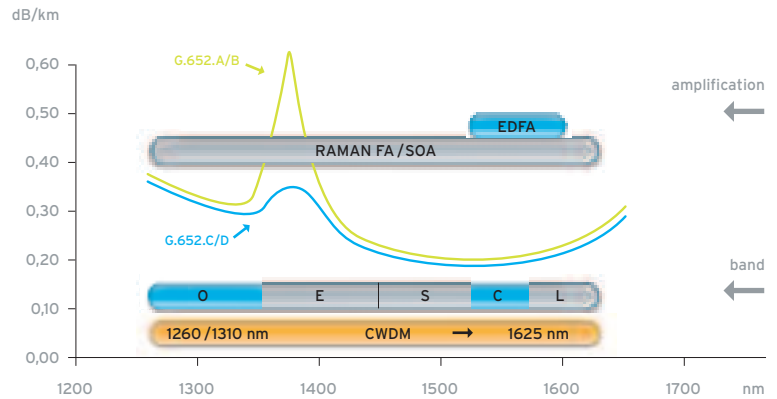

Indoor cables

Indoor cables must be flexible and light, though rugged and reliable in order to be suitable for the installation in buildings or the application as a flexible connecting cable. Strain relieved with highly resistant Aramid yarns and sheathed with a resistant LSHF compound or with PUR - in case of highly flexible applications - the mechanical properties of the cables are ideally combined.

Protecting LSHF sheath

Data cables - often installed 'open' in buildings and facilities - can cause fire propagation, i.e. a spread of the fire. Thus, flame retardancy has been among the minimum requirements of indoor cables for many years. Already today, responsible network designers prepare for greater safety requirements in buildings and facilities.

High-quality LSHF materials with considerably improved characteristics in case of fire are a proven and future-oriented alternative to the traditional PVC cables. The highest precautionary measures as to the cabling apply at crowded places (e.g. hospitals, airports, schools, department stores, hotels), in buildings with a high concentration of commodity values and wherever a breakdown would involve high expenses (e.g. industrial plants, electric power stations, EDP centres, banks, power plants) as well as in alarm, signal and control systems.

Improved fire protection characteristics

- No spread of fire (fire propagation), e.g. transmission of the local fire alongside the cables
- No emission of corrosive gases, possibly creating acid with extinguishing water
- Very low smoke development
- No Dioxin in the fire remains
- Considerably low toxicology of fire gases





UC^{FIBRE} | T N DA LSHF 0.4kN

| Mechanical properties | | 2G | |
|------------------------------------|---------------------|----|----------|
| Cable diameter | mm | | 3.0 /6.2 |
| Weight | kg/km | | 16 |
| Bending radius during installation | mm | | 50 |
| | during operation mm | | 25 |
| Tensile force | N | | 400 |

Applications

The duplex cable acc. to IEC 60794-2-10 with aramide strength members with flame-retardant, halogen-free outer sheath (LSHF) can be mounted to all common connectors and therefore is suitable for pigtails or interconnections. Data centre cabling 10-40Gbit solution acc. to TIA942 in all areas, especially for the Equipment Distribution Area.



UC^{FIBRE} | B N DA LSHF 0.8kN

| Mechanical properties | | 4G | 6G | 8G | 12G |
|------------------------------------|---------------------|-----|------|------|------|
| Cable diameter | mm | 7.2 | 9.9 | 12.5 | 12.9 |
| Weight | kg/km | 54 | 74 | 136 | 130 |
| Bending radius during installation | mm | 130 | 150 | 250 | 250 |
| | during operation mm | 75 | 100 | 150 | 150 |
| Tensile force | N | 800 | 1200 | 1600 | 2000 |

Applications

Due to the tensile relief of each core and to single sheaths, FO connectors can be connected right away. For rising and distribution purpose (plenum) the cables can be split individually by opening the outer sheath. The cables with LSHF material accord to the UL/NEC and IEC fire proofing requirements. Data centre cabling 10-40Gbit solution acc. to TIA942 in all areas, especially for the Equipment Distribution Area.



UC^{FIBRE} | FL N DA LSHF 0.4kN

| Mechanical properties | | 2G | |
|------------------------------------|---------------------|----|----------|
| Cable diameter | mm | | 3.8 /6.8 |
| Weight | kg/km | | 32 |
| Bending radius during installation | mm | | 60 |
| | during operation mm | | 30 |
| Tensile force | N | | 400 |

Applications

The duplex fibre cable with Aramide strength members with flame-retardant, halogen-free outer sheath (LSHF) can be mounted to all common connectors and therefore is suitable for pigtails or interconnections. Data centre cabling 10-40Gbit solution acc. to TIA942 in all areas, especially for the Equipment Distribution Area.



UC^{FIBRE} | DI N DA LSHF 0.8kN

| Mechanical properties | | 4G | 6G | 8G | 12G |
|------------------------------------|---------------------|-----|-----|-----|-----|
| Cable diameter | mm | 5.0 | 5.5 | 5.5 | 6.5 |
| Weight | kg/km | 20 | 25 | 25 | 31 |
| Bending radius during installation | mm | 100 | 100 | 100 | 130 |
| | during operation mm | 50 | 50 | 50 | 75 |
| Tensile force | N | 500 | 600 | 600 | 700 |

Applications

Mini-Breakout cables (distribution cables) are used in universal cabling systems. Applications are short distance connections, rising cables or distribution cables. The distribution cables with maximum 12 semi-tight fibres and glass yarn strength members have a flame-retardant and halogen-free outer sheath.

Universal cables

At the transition from the inside of the building to the access network between buildings, there is often a requirement profile that demands indoor as well as outdoor properties from the cables.

Therefore, universal or drop cables of series UC^{FIBRE} I/O CT can be applied as buried or duct cables and as riser cables in the interior of the building at the same time. Up to 24 fibres are available for constructions with central tubes, which permit a cost efficient and small sized cable design. The cables are UV-resistant, non-metallic, resistant to rodents, longitudinal watertight, have a high tensile strength and are halogen-free flame-retardant. They are suitable for both direct burial and indoor installation.

Fibre optic cables of series UC^{FIBRE} I/O ST with stranded loose tubes are often applied in the campus and building backbones where a higher number of fibres is required. The compact loose tube design with 12 fibres

per core permits a high packing density of the fibres, thus facilitating the fibre management in the distribution facilities. The cables are UV-resistant, non-metallic, resistant to rodents, longitudinal water-tight, have a very high tensile strength and are halogen-free flame-retardant. They are suitable for both direct burial and indoor installation.

In an industrial environment - both inside and outside the buildings - conditions are much rougher. In general, the cables are in fact watertight. However, additional aspects such as the following have to be considered when choosing the right cable:

- Chemical substances such as oils, solvents, etc.
- Permanent movements or vibration

- with the application e.g. in drag chains
- Extended ambient temperatures
- Electromagnetic influence both on the cable and caused by the cable

Fibre optic cables of series UC^{FIBRE} I/O ST with stranded single elements are designed for harsh environment. Due to the tensile relief of each core, FO connectors can be connected right away. For rising and distribution purposes, the cables can be split individually by opening the outer sheath. These cables are UV-resistant, non-metallic, rodent-protected, halogen-free flame-retardant, longitudinal watertight with a high tensile strength and therefore suitable for indoor riser installation and for outdoor duct or direct buried installation.





UC^{FIBRE} I/O CT D DA LSHF 1kN

| Mechanical properties | | 24G |
|------------------------------------|---------------------|------|
| Cable diameter | mm | 6.5 |
| Weight | kg/km | 45 |
| Bending radius during installation | mm | 150 |
| | during operation mm | 100 |
| Tensile force | N | 1000 |

Applications

FO indoor/outdoor cables with central loose tube design is UV-resistant, non-metallic, rodent protected, halogen-free flame-retardant, longitudinally watertight with tensile strength and therefore suitable for indoor riser installation as well as outdoor duct installation or direct burial.




UC^{FIBRE} I/O CT D DA LSHF 3.0kN

| Mechanical properties | | 24G |
|------------------------------------|---------------------|------|
| Cable diameter | mm | 9.5 |
| Weight | kg/km | 85 |
| Bending radius during installation | mm | 160 |
| | during operation mm | 100 |
| Tensile force | N | 3000 |

Applications

FO indoor/outdoor cables with stranded tubes are required for access networks in case a high number of fibres is necessary. They are suitable for outdoor duct and direct buried installation.



UC^{FIBRE} I/O ST D DA LSHF 6.0kN

| Mechanical properties | | 72G |
|------------------------------------|---------------------|------|
| Cable diameter | mm | 13 |
| Weight | kg/km | 170 |
| Bending radius during installation | mm | 300 |
| | during operation mm | 180 |
| Tensile force | N | 6000 |

Applications

FO indoor/outdoor cables with stranded tubes are required for access networks in case a high number of fibres is necessary. They are suitable for outdoor duct and direct buried installation.



UC^{FIBRE} I/O CT D DA LSHF 1.5kN

| Mechanical properties | | 24G |
|------------------------------------|---------------------|------|
| Cable diameter | mm | 8.0 |
| Weight | kg/km | 60 |
| Bending radius during installation | mm | 160 |
| | during operation mm | 100 |
| Tensile force | N | 1500 |

Applications

FO indoor/outdoor cables with central tubes are suitable for outdoor duct and indoor riser installation. The cable is UV-resistant, non-metallic, rodent-protected, halogen-free flame-retardant, longitudinally watertight with tensile strengthening.



UC^{FIBRE} I/O ST D DA LSHF 1.8kN

| Mechanical properties | | 72G |
|------------------------------------|---------------------|------|
| Cable diameter | mm | 10.5 |
| Weight | kg/km | 120 |
| Bending radius during installation | mm | 300 |
| | during operation mm | 210 |
| Tensile force | N | 1800 |

Applications

FO indoor/outdoor cables with stranded tubes are required for access networks in case a high number of fibres is necessary. They are suitable for outdoor duct and indoor riser installation.



UC^{FIBRE} I/O B D DA LSHF 3.0kN

| Mechanical properties | | 6G |
|------------------------------------|---------------------|------|
| Cable diameter | mm | 11.5 |
| Weight | kg/km | 120 |
| Bending radius during installation | mm | 200 |
| | during operation mm | 120 |
| Tensile force | N | 3000 |

Applications

FO indoor/outdoor cables are made for harsh environment. Due to the tensile relief of each core and to single sheaths, FO connectors can be connected right away. For rising and distribution purpose the cables can be split individually by opening the outer sheath. They are suitable for outdoor duct and direct buried installation.

Outdoor cables

A sudden impact with the installation, a hammer accidentally falling down, extreme temperature changes, small cable ducts, humidity in the installation area - UC^{FIBRE} outdoor cables guarantee best transmission performance also under extreme conditions. Of particular importance for an efficient and easy installation and network maintenance: smooth handling of the connectorisation and during the splicing process.


Outdoor cables of series UC^{FIBRE} O ST with stranded loose tube serve as buried or duct cables and are applied in the campus backbone where more than 24 fibres are required. The compact loose tube design with 12 fibres per core permits a high packing density of the fibres, thus facilitating the fibre management in the distribution facilities. The cables are UV-resistant, non-metallic, resistant to rodents, longitudinal watertight

and have a very high tensile strength. They can be blown in and are suitable for direct burial.

Micro-cables for blow-in systems

Draka's micro-cables for blow-in systems are not only a technical advancement or a system in order to plan and build new networks, it also offers clear cost advantages compared to the traditional installation

completely equipped with standard cables. Compact and robust designs offer proven network solutions specifically where shortages of space for the cable routing prevail. We offer a complete series of innovative cables, thus achieving highest possible flexibility for the cabling within broadband networks. The system is based on blow-in technology and links distances meanwhile going far beyond the "last mile".

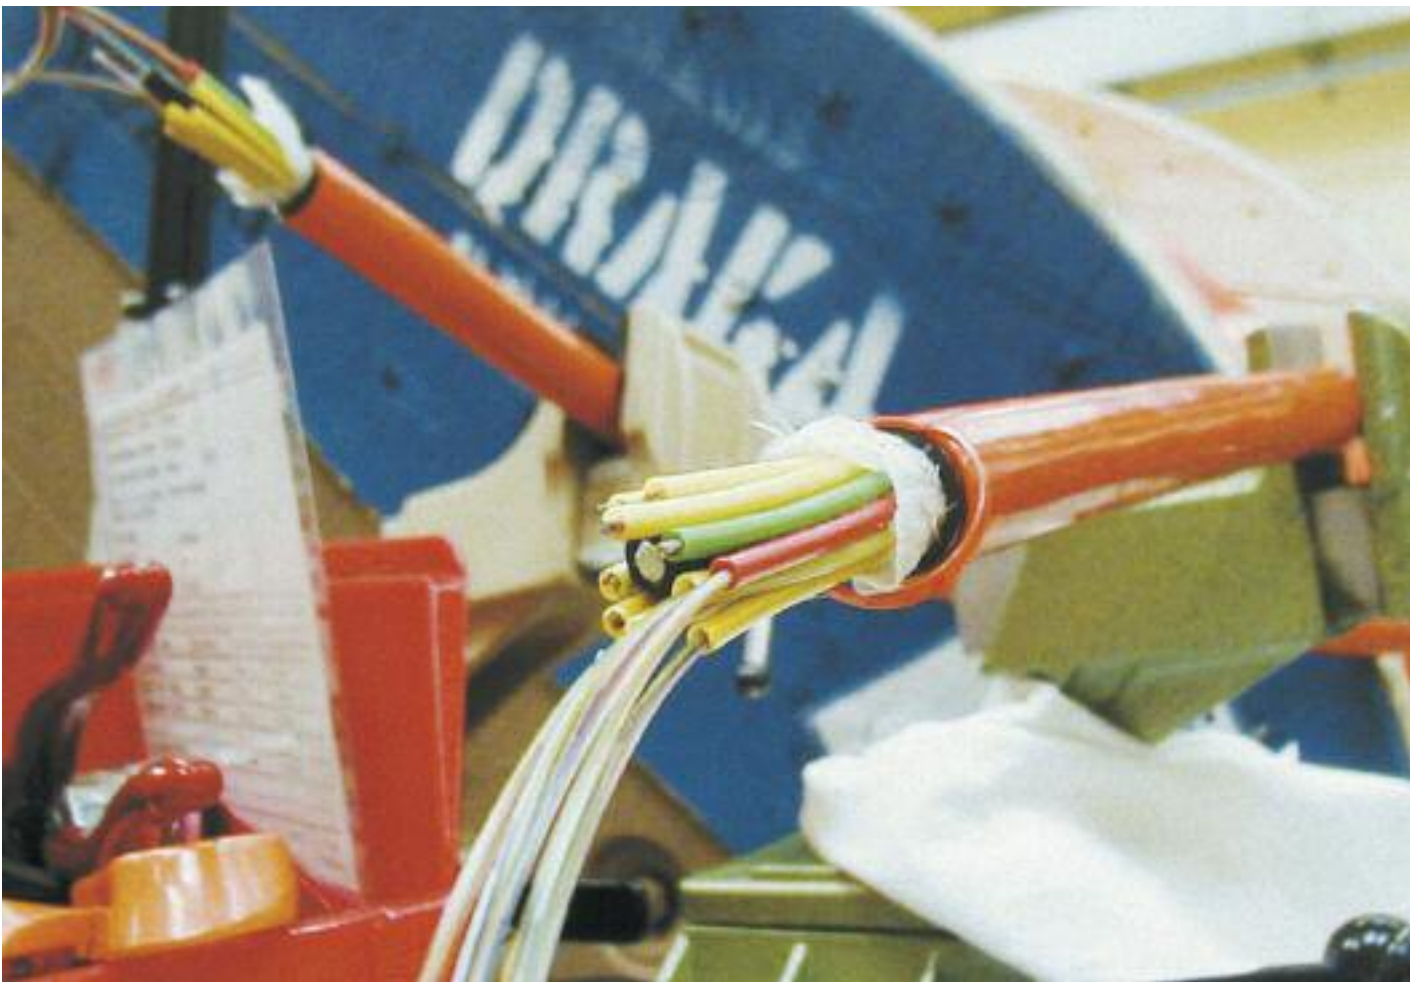

Optical properties

Fibre types Quality 850 nm 1310 nm 1550 nm

| | | | | |
|-----------------|-------|-------------------------|------------------------------------|---|
| MM 50/125 μ | B | $\alpha \leq 2.7$ dB/km | $\alpha \leq 0.8$ dB/km | - |
| NA = 0,20 | | $B \geq 500$ MHz·km | $B \geq 800$ MHz·km | - |
| | A | $\alpha \leq 2.5$ dB/km | $\alpha \leq 0.7$ dB/km | - |
| | | $B \geq 600$ MHz·km | $B \geq 1200$ MHz·km | - |
| HiCap™ | OM 2+ | $\alpha \leq 2.5$ dB/km | $\alpha \leq 0.7$ dB/km | - |
| | | $B \geq 600$ MHz·km | $B \geq 2000$ MHz·km ¹⁾ | - |

| | | | | |
|---------------------|-------|-------------------------|------------------------------------|---|
| MM 62,5/125 μ m | B | $\alpha \leq 3.2$ dB/km | $\alpha \leq 1.0$ dB/km | - |
| NA = 0,27 | | $B \geq 200$ MHz·km | $B \geq 500$ MHz·km | - |
| | A | $\alpha \leq 3.0$ dB/km | $\alpha \leq 0.9$ dB/km | - |
| | | $B \geq 200$ MHz·km | $B \geq 600$ MHz·km | - |
| HiCap™ | OM 1+ | $\alpha \leq 3.0$ dB/km | $\alpha \leq 0.7$ dB/km | - |
| | | $B \geq 200$ MHz·km | $B \geq 2000$ MHz·km ¹⁾ | - |

| | | | | |
|-----------|------|-------------------------|-------------------------|---|
| MaxCap300 | OM 3 | $\alpha \leq 2.7$ dB/km | $\alpha \leq 0.5$ dB/km | - |
| | | $B \geq 1500$ MHz·km | $B \geq 500$ MHz·km | - |
| | | 1GbE R > 900 m | R > 550 m | |
| | | 10GbE R > 300 m | R > 300 m | |

| | | | | |
|------------|------|-------------------------|-------------------------|---|
| MaxCapH550 | OM 4 | $\alpha \leq 2.5$ dB/km | $\alpha \leq 0.7$ dB/km | - |
| | | $B \geq 3500$ MHz·km | $B \geq 500$ MHz·km | - |
| | | 1GbE R > 1100 m | R > 550 m | |
| | | 10GbE R > 550 m | R > 300 m | |

Fibre types Quality 1300 nm 1550 nm 1625 nm

| | | | | |
|--------------------------|------------|--------------------------|--------------------------|--------------------------|
| SM 9/125 | G.652.A/B | $\alpha \leq 0.36$ dB/km | $\alpha \leq 0.25$ dB/km | - |
| $\lambda_{CC} < 1270$ nm | | $CD \leq 3.5$ ps/km·nm | $CD \leq 18$ ps/km·nm | - |
| SM 9/125 | G.652.C/D* | $\alpha \leq 0.36$ dB/km | $\alpha \leq 0.25$ dB/km | - |
| $\lambda_{CC} < 1270$ nm | | $CD \leq 3.5$ ps/km·nm | $CD \leq 18$ ps/km·nm | - |
| SM 9/125 | G.655 | - | $\alpha \leq 0.25$ dB/km | $\alpha \leq 0.35$ dB/km |
| $\lambda_{CC} < 1400$ nm | | - | $CD \leq 1$ ps/km·nm | $CD \leq 10$ ps/km·nm |
| SM 9/125 | G.657 B | $\alpha \leq 0.39$ dB/km | $\alpha \leq 0.25$ dB/km | |
| $\lambda_{CC} < 1260$ nm | | $CD \leq 3.0$ ps/km·nm | $CD \leq 18$ ps/km·nm | - |

1) = Measurement method in preparation: IEC60793-1-49

*) = $a \pm 0,4$ dB/km in the entire wavelength range 1285 nm < λ < 1625 nm

λ_{CC} = SM cable cut-off wavelength in the cable (cut-off)

α = Attenuation

NA = Numerical aperture

B = Overfilled modal bandwidth


CD = Chromatic dispersion

R = Distance

1GbE = 1Gigabit Ethernet

10GbE = 10Gigabit Ethernet

Cable description

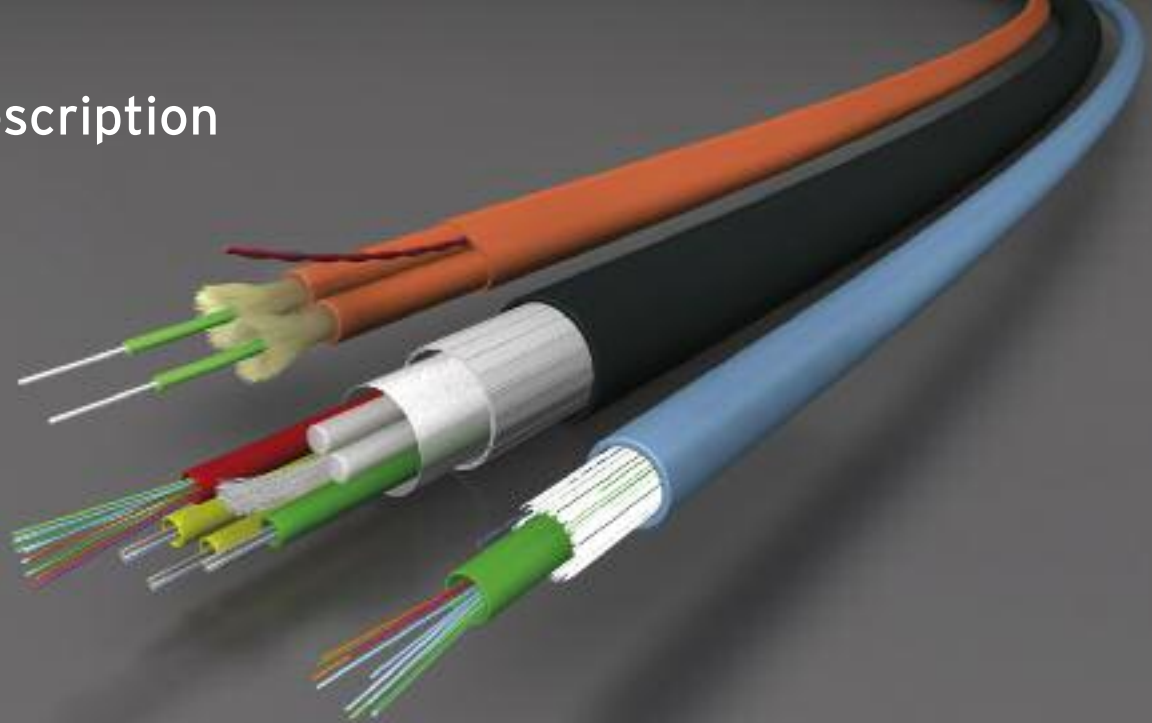

| UC ^{FIBRE} _ | I/O_ | CT_ | D_ | DA_ | LSHF-FR_ | 1kN_ | 12_ | MM52 |
|-----------------------|------|-----|----|-----|----------|------|-----|---|
| | | | | | | | | <ul style="list-style-type: none"> □ MM52 Multimode 50/125 OM2 □ MM53 Multimode 50/125 OM3 □ MM54 Multimode 50/125 OM4 □ MM61 Multimode 62,5/125 OM1 □ MM62 Multimode 62,5/125 OM2 □ SM2D Singlemode 9/125 G.652 D □ SM7B Singlemode 9/125 G.657 B |
| | | | | | | | | <ul style="list-style-type: none"> □ N Number of total Fibres, $N = X \times n$; X = number of elements, n = number of fibres per element |
| | | | | | | | | <ul style="list-style-type: none"> □ xkN 0 - 9 kiloNewton |
| | | | | | | | | <ul style="list-style-type: none"> □ LSHF-FR Low Smoke Halogen Free-Flame Retardant sheath IEC 60332-3 C □ LSHF Low Smoke Halogen Free sheath IEC 60332-1 □ PE PE sheath □ PUR PUR sheath □ PR Plastics Rubber □ PF Plastics Fluoroplastics □ PA PA sheath |
| | | | | | | | | <ul style="list-style-type: none"> □ DA Dielectric Armour □ MA Metallic Armour |
| | | | | | | | | <ul style="list-style-type: none"> □ D Dry, unfilled (waterblocked with waterswellable materials) □ F Jelly Filled □ N Not waterblocked |
| | | | | | | | | <ul style="list-style-type: none"> □ S Single cable □ T Twin duplex cable □ FL Flat duplex cable with additional outer sheath □ DI Distribution (Mini-Break-Out) □ B Break-Out cable □ CT Central Tube cable □ ST Stranded Tube cable |
| | | | | | | | | <ul style="list-style-type: none"> □ I Indoor □ I/O Indoor/Outdoor □ O Outdoor |
| | | | | | | | | <ul style="list-style-type: none"> □ UC^{FIBRE} Universal Cable FIBRE |

Draka Communications - Cables in Copper and Optical Fibre Technology for:

- Office Communication
- Central Office Switching
- Data Centre
- Home Networks
- Industry
- Studio
- CATV
- Long-distance networks
- Subscriber networks (FttX)
- Telecommunication networks
- Mobile telephone systems
- OPGW
- Signalling cables



We make communication technology work, by serving you in every way to realize your leading edge network solution

Draka Communications has offices and production facilities all over the world. To get in touch with us and find out how we can help you build your network, visit our website at www.draka.com or contact us at:

Our offices in the EMEA region:

Austria

- Trillergasse 8
A-1210 Vienna
Phone: +43 1 294 0095 16
Telefax: +43 1 294 0095 97
brigitte.leitner@draka.com

Denmark

- Priorparken 833,
DK-2605 Broendby,
Phone: +45 43 48 20 50
Telefax: +45 43 48 26 59
br.info@draka.com

Finland*

- Kimmeltie 1
FI - 02110 Espoo
Phone: +358 10 56 61
Telefax: +358 10 56 63 394
fi-info@draka.com

*)including: The Baltic, Poland, Ukraine, Belarus, Georgia and Armenia.

France

- Le Sophocle - Parc de Algorithmes 9,
Avenue du Marais
95100 Argenteuil
Phone: +33 1 34 34 41 30
Telefax: +33 1 30 76 40 12
dcf.sales@drakacomteq.com

Germany

- Friedrichshagener Strasse 29-36
D - 12555 Berlin
Phone: +49 30 65 485 760
Telefax: +49 30 65 485 602
berlin.info@draka.com

Germany*

- Piccolomini Strasse 2
D - 51063 Cologne
Phone: +49 221 67 70
Telefax: +49 221 67 73 890
koeln.info@draka.com

*)including: Switzerland

Germany

- Bonnenbroicher Strasse 2-14
D - 41238 Moenchengladbach
Phone: +49 21 66 134 0
Telefax: +49 21 66 134 1000
kabel.mg@drakacomteq.com

Netherlands (HQ - Comteq Cable Division)

- De Boelelaan 7 - Building Officia I
1083 HJ Amsterdam
Phone: +31 20 56 89 865
Telefax: +31 20 56 89 409
comteq.info@draka.com

Netherlands (HQ - Comteq Fiber Division)

- Zwaanstraat 1
5651 CA Eindhoven
Phone: +31 40 295 87 00
Telefax: +31 40 295 87 10
fibresales@draka.com

Netherlands*

- Zuidelijk Halfmond 11
2801 DD Gouda
Phone: +31 182 59 21 00
Telefax: +31 182 59 22 00
nl.dct.info@draka.com

*)including: Belgium, Luxembourg

Norway*

- Kjerraten 16
3013 Drammen
Phone: +47 32 24 90 00
Telefax: +47 32 24 91 16

*)including: Sweden and Iceland

Romania*

- NK Cables Ltd.
10, Montreal Place, WTC
Entrance F, 1st Floor
011469 Bucharest
Phone: +40 21 202 3057
Telefax: +40 21 202 3100
vladimir.doicaru@draka.ro

*)including: Bulgaria, Greece and Moldova

Russia

- Neva Cables Ltd.
8th Verkhny pereulok, 10,
St.Petersburg, 194292
Phone: +7 812 592 84 79
Telefax: +7 812 592 77 79
office@nevacables.ru

Spain

- Av. de Bilbao 72
39.600 Mallaño - Cantabria
Phone: +34 942 24 71 00
Telefax: +34 942 24 71 14
ana.sierra@draka.com

Spain*

- Can Vinyalets núm. 2
08130 Sta. Perpetua de la Mogoda -
Barcelona
Phone: +34 935 74 83 83
Telefax: +34 935 60 13 42
josep.cabrera@draka.com.es

*)including: Portugal and Italy

Turkey*

- Ebulula Cad. 4,
Gazeteciler Sitesi A 14-4
Levent-Besiktas
Istanbul
Phone: +90 212 280 25 59
Telefax: +90 212 280 32 08
mea-info@draka.com

*)including: All other countries in Africa and Middle East

United Kingdom*

- Crowther Road, Crowther Industrial
Estate,
Washington, Tyne and Wear, NE38 0AQ
Phone: +44 191 415 50 00
Telefax: +44 191 415 82 78
comtequk@draka.com

*)including: Ireland

Our European Production Centres:

Denmark

- Broendby

Finland

- Oulo

France

- Calais Cedex
- Haisnes Cedex

Germany

- Berlin
- Nurenberg
- Moenchengladbach

Netherlands

- Eindhoven
- Delfzijl

Russia

- St. Petersburg

Slovakia

- Presov

Spain

- Santander

United Kingdom

- Washington, Tyne and Wear

www.draka.com

We are an equal opportunity employer

