


Universal Single Jacket LSOH Central Loose Tube Cable with Fiberglass Reinforcement EXO-G0

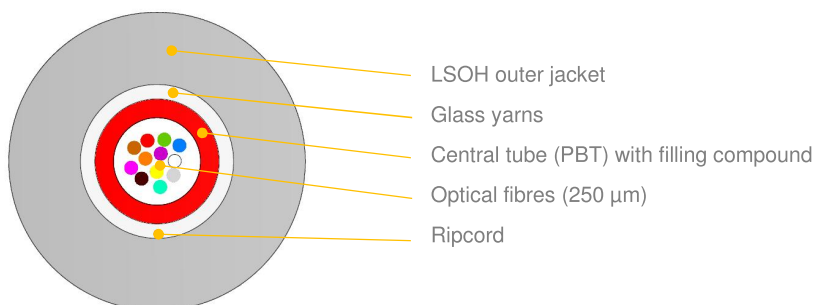

*schematic drawing, not to scale

APPLICATION

Internal installation
 External installation into teletechnical ducts
 Fully dielectric
 Basic rodent protection
 LAN and FTTX networks
 Distribution network
 ODF connections

DESIGN

LSOH outer jacket - various colours available
 Central tube (PBT Ø 3,2mm) with thixotropic filling compound
 Glass yarns as a strain relief and water absorbent
 Polyester ripcord

VARIANTS

Version	Quantity [pcs]		Ø nominal (±5%) [mm]	Nominal weight (±5%) [kg/km]	Max allowed tension [N] / ε≤0,6%	Max static tension [N] / ε≤0,2%
	Fibres	Fibres per tube				
1T x 2F	2	2	5,9	37	2000	500
1T x 4F	4	4	5,9	37		
1T x 6F	6	6	5,9	37		
1T x 8F	8	8	5,9	37		
1T x 12F	12	12	5,9	38		
1T x 16F	16	16	5,9	38		
1T x 18F	18	18	5,9	38		
1T x 24F	24	24	5,9	40		

TECHNICAL AND ENVIRONMENTAL CABLE CHARACTERISTICS

Test	Standard	Conditions	Requirements
Tensile strength	IEC60794-1-21 Method E1	Short term: 2000N	Fibre strain: ≤0,6%, Δα reversible
		Long term: 500N	Fibre strain: ≤0,2%, Δα≤0,05 dB/km
Crush resistance	IEC60794-1-21 Method E3	Load: 1500 N / 10 cm / 5 minutes	Δα ≤ 0.1dB No jacket cracking and fibre breakage
Torsion	IEC60794-1-21 Method E7	Cable length to be twisted: 2m No. of cycles: 5 Twist angle: starting position to -180° to starting position to +180°, and back (360° total) Load: 100N	Δα≤0.1dB No jacket cracking and fibre breakage
Bending	IEC 60794-1-21 Method E11	Radius: 15 x OD	Δα≤0.1dB No jacket cracking and fibre breakage
Water penetration	IEC 60794-1-22 Method F5A, F5B	Water head: 1m Sample length: 3m Time: 24 hrs	No water leakage
Temperature range	IEC60794-1-22 Method F1	Installation:	-5... +55 [°C]
		Operation:	-20... +70 [°C]
		Transport & Storage:	-20... +70 [°C]
CPR Class	EN 50575:2014+A1:2016		Eca

(*) values for single-mode fibres, all optical measurements performed at @1550nm

Type:	EXO G0 LH_CPR	REV: 2.6
Issued:	02/10/2017	AM
Modified:	06/03/2024	NJ

OPTICAL FIBRE AND LOOSE TUBE COLOUR IDENTIFICATION

For optical fibres and loose tube identification information please see DSH_Colors_CODE_XXXX document.

FIBRE PARAMETERS

For selected post-production optical fibres parameters please see DSH_OFP document.

MARKING

The following print (inkjet) is applied at 1-meter intervals.

- Handset symbol
- CPR Euro Class
- Double Sine symbol
- Supplier FIBRAIN
- Type of cable
- Year of manufacture: xxxx
- Standard code (Product type, fibre type, fibre count)
- Length marking in meters
- Cable ID / Drum No


Example: "HANDSET" - EN 50575 Eca - "DOUBLE SINE" - FIBRAIN - Fibre Optic Cable - "YEAR OF MANUFACTURE" - EXO-G0 12F G657A1 CT 3.2 LSOH - "LENGTH MARKING" - "BATCH NUMBER"

The accuracy of marking is $\pm 0.5\%$. Remarking is in accordance with Bellcore GR 20 and supersedes earlier markings. Occasional loss of marking is possible. Cables can be supplied with a range of single mode or multimode fibres and customized print.


PACKING

Cables are shipped on disposable wooden or treated wooden drums. Both ends of the cable are capped and at least one is accessible for testing. Identification information is placed on a drum. Typical spool length is 2000 – 8000 meters $\pm 5\%$, with possibility of supplying up to 5% of total contract quantity as short length cables which should be above 1000 meters long. Tolerance of 5 % of order quantity shall be allowed

STANDARD JACKET COLOURS




Black RAL 9005



Light Grey RAL 7037


OPTIONAL JACKET COLOURS**

SM G.652D




RAL 1021

SM G657A1, A2, A3




RAL 9010

MM 50/125 OM2




RAL 2003

MM 50/125 OM3



RAL 6027

MM 50/125 OM4



RAL 4003

**On request.

This document and the statements contained in it are not intended for customers within the meaning of the Civil Code. The information submitted in this document is to our knowledge and belief true at the time of issue, however, we do not assume any liability whatsoever for its accuracy, and completeness. This document is for informational purposes on an "as is" basis only and Fibrain reserves the right to change its contents at any time without prior notice. The specification cannot, in any case, be considered an offer within the meaning of the Civil Code and is not contractually valid unless specifically authorized by Fibrain. Before using this product, its buyer and/or user has to make sure that it is suitable for the intended use. All liability issues related to this product are subjected to the seller's separate Terms of Sale or the terms and conditions agreed with the Fibrain representative or distributor.